



# UV

## Model: WP-UVx-G1/2-2y

- 
- 
- 0-5V 4-20mA
- 



		(mm)	(g)	
		8	120	316L
	$T_{opt}$	-30-85	°C	
	$T_{sto}$	-40-90	°C	
	p	10	bar	
(25 °C)				
	$V_{cc}$	9-24	V	
	$I_{out}$	4-20	mA	2 (WP-UVx-G1/2-21)
				3 (WP-UVx-G1/2-22)
	$V_{out}$	0-5	V	3 (WP-UVx-G1/2-23)
1	$\lambda$	220-280	nm	WP-UVC-G1/2-2y
		220-325		WP-UVB-G1/2-2y
		220-370		WP-UVA-G1/2-2y
		290-440		WP-UVV-G1/2-2y
	P	0-200	mW/cm <sup>2</sup>	2
	5pin			
	2			

<sup>1</sup> UVA, UVB, UVC, UVV      UV



<sup>2</sup> : 0-200 mW/cm<sup>2</sup> (standard), 0-1 W/cm<sup>2</sup> (option), 0-10 W/cm<sup>2</sup> (option), 0-40 W/cm<sup>2</sup> (option).



UV

Model: WP-UVx-G1/2-2y

(unit: mm)

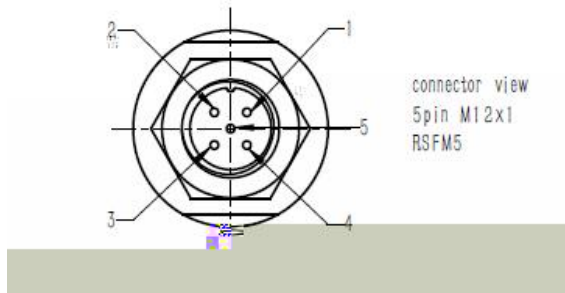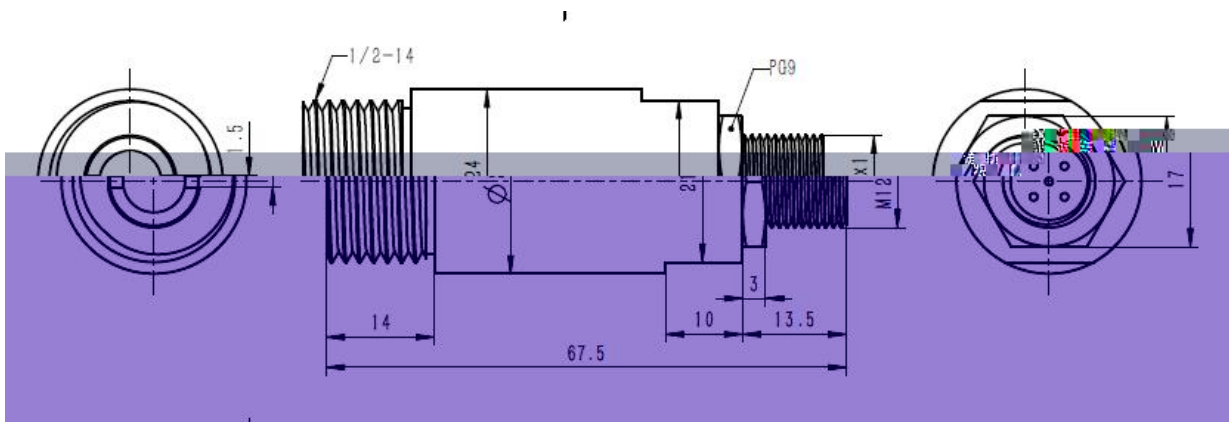


connector view  
5pin M12x1  
RSFM5

5 : 1=V<sub>cc</sub>, 2= , 3= , 4= / , 5=

UV ( )

- 
- 
- 
- 
- 
- 

100%  
24 V

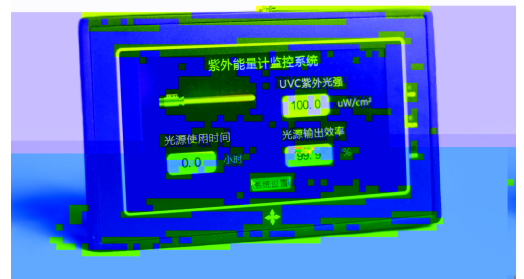

UV ( )

- 
- 
- 
- 
- 
- 

5

RS-485

9-24 V

